



LITElution 48" 150W 100-277V / 347V – Product Specifications

Product Specifications

- | | |
|---|----------------------|
| <u>Model No.</u> | <u>Input Voltage</u> |
| LM48-S150-FH-L-50K-M2-0-P3-D0-1R-SL-CR-CO | 100-277Vac |
| LM48-S150-FH-L-50K-S3-0-P8-3.CD-1R-SL-CR-85M0 | 100-277Vac |
| LM48-S150-FH-H-50K-S4-0-P8-3.CD-1R-SL-CR-85M0 | 347Vac |
- Product Description : LED Luminaire 48" 150W 100-277Vac / 347Vac CCT 5000K
- General Application : Indoor
- Primary Use: High-bay luminaires for commercial & Industrial buildings
- Dimensions : 119mm (H) x 1137mm (L) x 252mm (W)
- Efficacy : 110.3 LPW nominal
- Delivered Light Output : 16,410 lumens nominal
- Scaled Input Power : 150W nominal
- Input Voltage : 100-277 Vac / 347 Vac, 50/60Hz
- CRI : > 80 CRI
- CCT : 5000K
- Power Factor : > 0.9
- Total Harmonic Distortion (current) : < 20%
- Operating Temperature Range : 25°C ±40%
- Limited Warranty : 5 years
- Mounting Method : Rod, Chain, Surface Mount
- LED Chip Lifetime L70 / L90 : 85,000 / 55,000 hours typical



Other Advantages

- Super Durable LED's at 90% & 70% brightness, LED's have an operating life of 85,000 & 55,000 hours respectively (L70 / L90 Report)
- Low Operating Temperature at 55 degree Celsius reduces energy costs of additional temperature control mechanisms and extends the products life.
- Non-hazardous, environmentally friendly



Replaces Any Of



400W
Metal Halide




230W
48" T5 x 4 lamps



230W
96" T12 x 2 lamps

About CREE XLamp XH-G LED's

Xlamp XH-G Provides Superior Long-Term Performance At 105°C

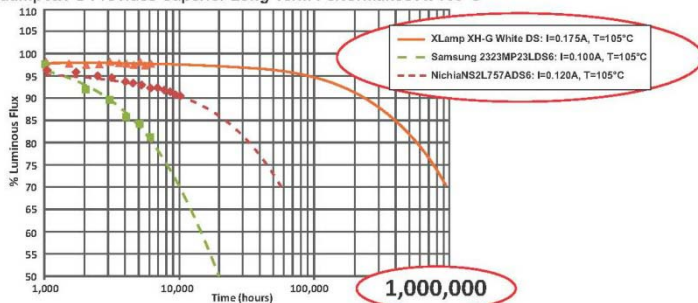

Current	80 mA	
Ta/Tsp	85°C	105°C
α	1.185E-06	6.892E-07
β	0.9865	0.9798
Duration	14,616	14,112
Calculated L70	>263,000	>233,000
Reported L90	77,500	>77,600
Reported L80	>87,700	>77,600
Reported L70	>87,700	>77,600

Current	175 mA	
Ta/Tsp	85°C	105°C
α	1.631E-06	3.322E-06
β	0.9870	0.9960
Duration	14,112	14,112
Calculated L70	211,000	106,000
Reported L90	56,600	30,500
Reported L80	>84,700	66,000
Reported L70	>84,700	>84,700